





CATENACCIO E SCROCCO REGOLABILE - DEAD AND ADJUSTABLE LATCH BOLT  
SCROCCO INTERCAMBIABILE CON RULLLO COD. 01435 (TRANNE COD.1300.20.\*\*)  
LATCH BOLT INTERCHANGEABLE WITH ROLLER BOLT COD. 01435 (BUT COD.1300.20.\*\*)

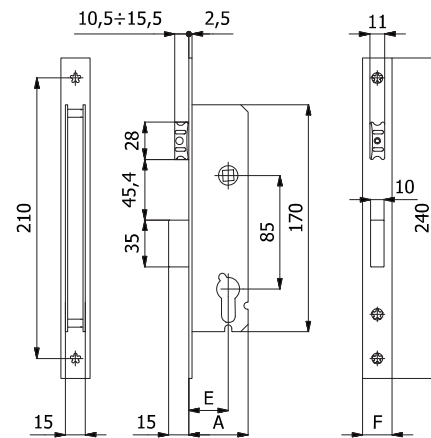

CARATTERISTICHE COSTRUTTIVE: Scatola e coperchio in acciaio zincato e plastificato - Frontale in acciaio inox - Catenaccio in lega speciale nichelata - Scrocco anti-rumore in lega speciale nichelata - Ingegno maniglia in lega speciale zincata foro  $\varnothing$  8 mm.

FUNZIONAMENTO: Catenaccio comandato dalla chiave - Scrocco comandato dalla chiave o dalla maniglia.

MANO: Reversibile.

PARTI IN DOTAZIONE: Vite cilindro.

CONSTRUCTIVE FEATURES: Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy dead bolt - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device  $\varnothing$  8 mm.

WORKING: Key driven dead bolt - Handle or key driven latch bolt.

HAND: Reversible.

PROVIDED WITH: Cylinder screw.

COD.	EX COD.	E	F	A	mandate throws	kg		
1300.20.16		20	16	35	1	0,38	1	5
1300.20.22	100120	20	22	35	1	0,42	1	5
1300.20.25		20	25	35	1	0,44	1	5
1300.25.16		25	16	40	1	0,41	1	5
1300.25.22	100130	25	22	40	1	0,45	1	5
1300.25.25		25	25	40	1	0,47	1	5
1300.30.16		30	16	45	1	0,44	1	5
1300.30.22	100140	30	22	45	1	0,48	1	5
1300.30.25		30	25	45	1	0,50	1	5
1300.35.16		35	16	50	1	0,47	1	5
1300.35.22	100150	35	22	50	1	0,51	1	5
1300.35.25		35	25	50	1	0,53	1	5
1300.40.16		40	16	55	1	0,50	1	5
1300.40.22	100160	40	22	55	1	0,54	1	5
1300.40.25		40	25	55	1	0,56	1	5