


**SERRATURE MULTIPUNTO PER MONTANTI**  
**VERTICAL MULTI-POINT LOCKS**



**3 CATENACCI E SCROCCO REGOLABILE - 3 DEAD BOLTS AND ADJUSTABLE LATCH BOLT**  
**SCROCCO INTERCAMBIABILE CON RULLO COD. 01435 - LATCH BOLT INTERCHANGEABLE WITH ROLLER BOLT COD. 01435**

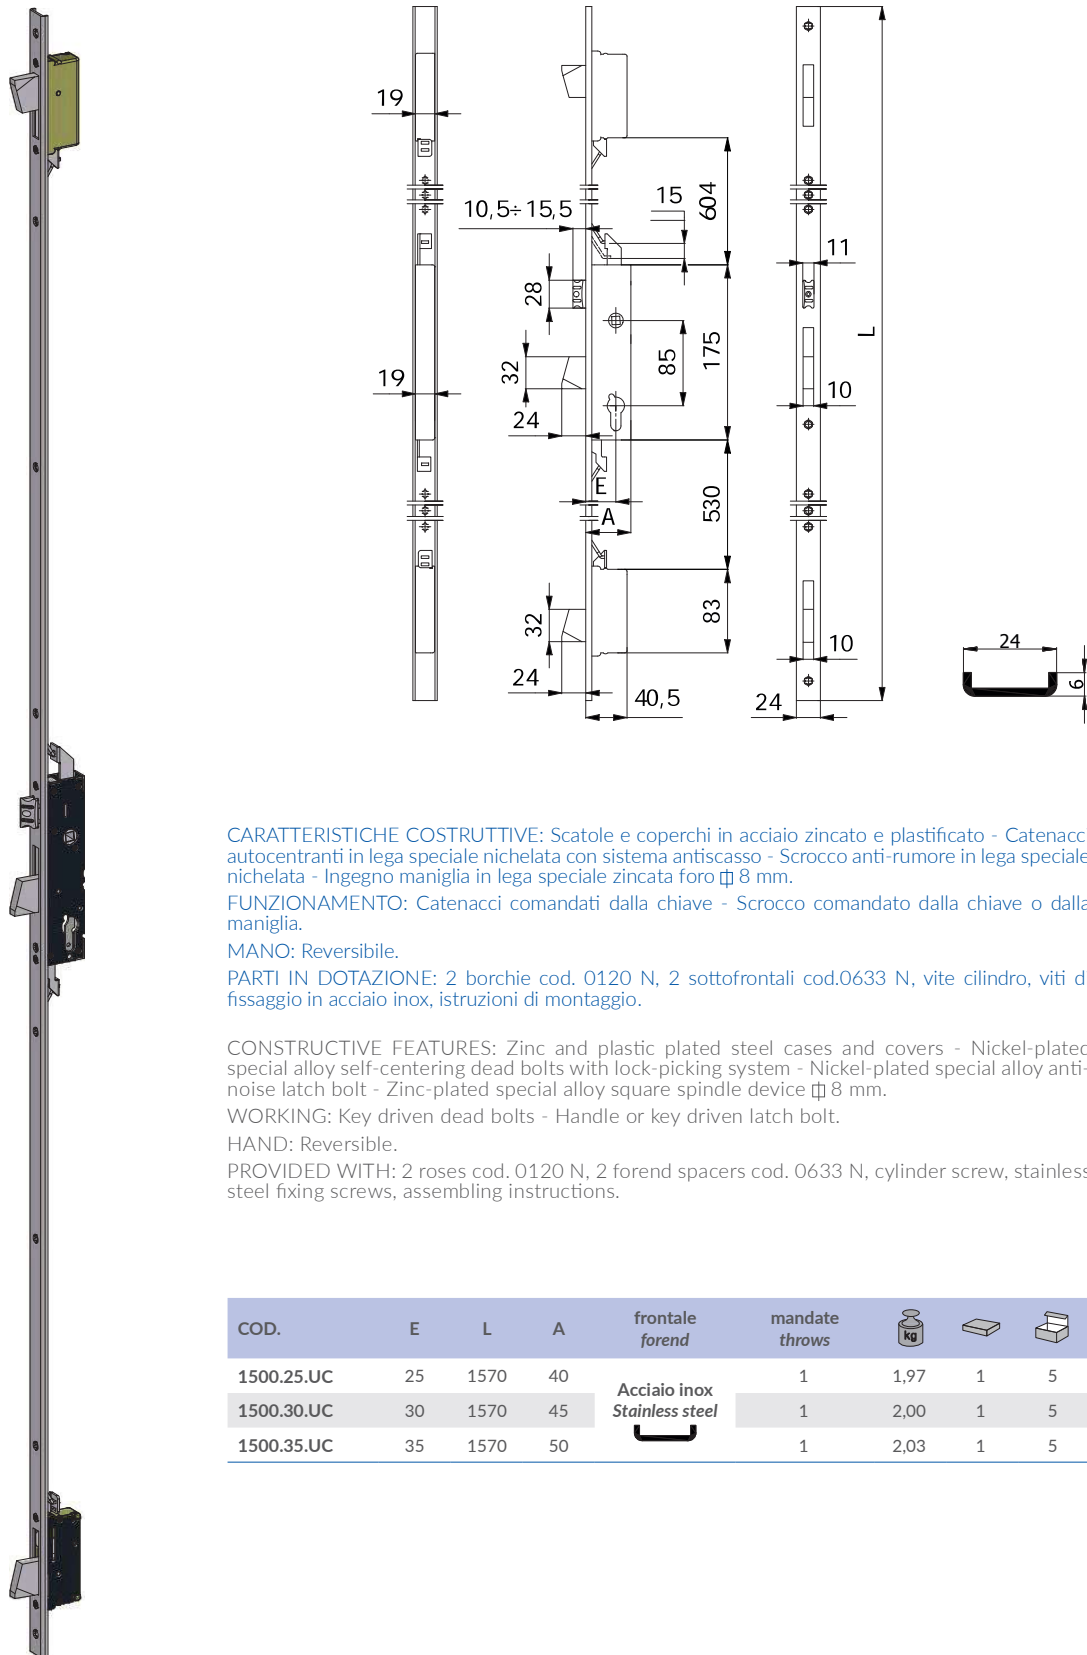

**CARATTERISTICHE COSTRUTTIVE:** Scatole e coperchi in acciaio zincato e plastificato - Catenacci autocentranti in lega speciale nichelata con sistema antiscasso - Scrocco anti-rumore in lega speciale nichelata - Ingegno maniglia in lega speciale zincata foro  $\varnothing$  8 mm.

**FUNZIONAMENTO:** Catenacci comandati dalla chiave - Scrocco comandato dalla chiave o dalla maniglia.

**MANO:** Reversibile.

**PARTI IN DOTAZIONE:** 2 borchie cod. 0120 N, 2 sottofrontali cod.0633 N, vite cilindro, viti di fissaggio in acciaio inox, istruzioni di montaggio.

**CONSTRUCTIVE FEATURES:** Zinc and plastic plated steel cases and covers - Nickel-plated special alloy self-centering dead bolts with lock-picking system - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device  $\varnothing$  8 mm.

**WORKING:** Key driven dead bolts - Handle or key driven latch bolt.

**HAND:** Reversible.

**PROVIDED WITH:** 2 roses cod. 0120 N, 2 forend spacers cod. 0633 N, cylinder screw, stainless steel fixing screws, assembling instructions.

COD.	E	L	A	frontale forend	mandate throws	kg		
1500.25.UC	25	1570	40	Acciaio inox Stainless steel	1	1,97	1	5
1500.30.UC	30	1570	45		1	2,00	1	5
1500.35.UC	35	1570	50		1	2,03	1	5