


SERRATURE MULTIPUNTO PER MONTANTI
VERTICAL MULTI-POINT LOCKS



3 CATENACCI E SCROCCO REGOLABILE - 3 DEAD BOLTS AND ADJUSTABLE LATCH BOLT
SCROCCO INTERCAMBIABILE CON RULLO COD. 01435 - LATCH BOLT INTERCHANGEABLE INTO ROLLER BOLT COD. 01435

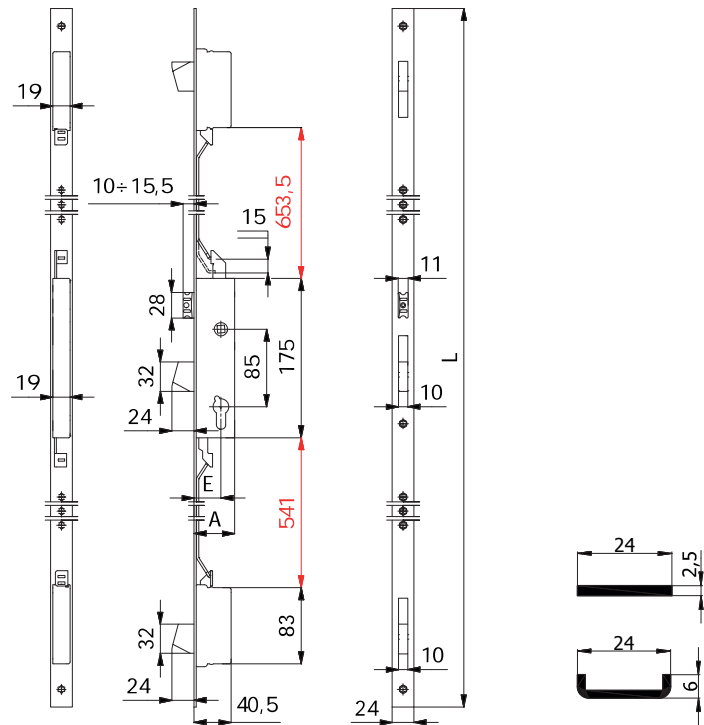

CARATTERISTICHE COSTRUTTIVE: Scatole e coperchi in acciaio zincato e plastificato - Catenacci autocentranti in lega speciale nichelata con sistema antiscasso - Scrocco anti-rumore in lega speciale nichelata - Ingegno maniglia in lega speciale zincata foro \varnothing 8 mm.

FUNZIONAMENTO: Catenacci comandati dalla chiave - Scrocco comandato dalla chiave o dalla maniglia.

MANO: Reversibile.

PARTI IN DOTAZIONE: 2 borchie cod. 0120 N, 2 sottofrontali cod.0633 N (per frontale a "U"), vite cilindro, viti di fissaggio in acciaio inox, istruzioni di montaggio.

CONSTRUCTIVE FEATURES: Zinc and plastic plated steel cases and covers - Nickel-plated special alloy self-centering dead bolts with lock-picking system - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device \varnothing 8 mm.

WORKING: Key driven dead bolts - Handle or key driven latch bolt.

HAND: Reversible.

PROVIDED WITH: 2 roses cod. 0120 N, 2 forend spacers cod. 0633 N (for "U" shaped forend), cylinder screw, stainless steel fixing screws, assembling instructions.

COD.	E	L	A	frontale forend	mandate throws	cilindro cylinder			
1500.25.PL	25	2300	40		1		2,30	1	5
1500.30.PL	30	2300	45		1		2,33	1	5
1500.35.PL	35	2300	50		1		2,36	1	5
1500.25.UL	25	2300	40		1		2,30	1	5
1500.30.UL	30	2300	45		1		2,33	1	5
1500.35.UL	35	2300	50		1		2,36	1	5
3500.30.PL	30	2300	45		1	Cilindro svizzero Swiss profile cylinder	2,33	1	5
3500.35.PL	35	2300	50		1		2,36	1	5
3500.30.UL	30	2300	45		1		2,33	1	5
3500.35.UL	35	2300	50		1		2,36	1	5