


**SERRATURE MULTIPUNTO AD INGRANAGGI PER MONTANTI**  
**VERTICAL MULTI-POINT LOCKS WITH GEAR MECHANISM MOVEMENTS**



**3 CATENACCI E SCROCCO REGOLABILE - 3 DEAD BOLTS AND ADJUSTABLE LATCH BOLT**  
**SCROCCO INTERCAMBIABILE CON RULLO COD. 01435 - LATCH BOLT INTERCHANGEABLE WITH ROLLER BOLT COD. 01435**

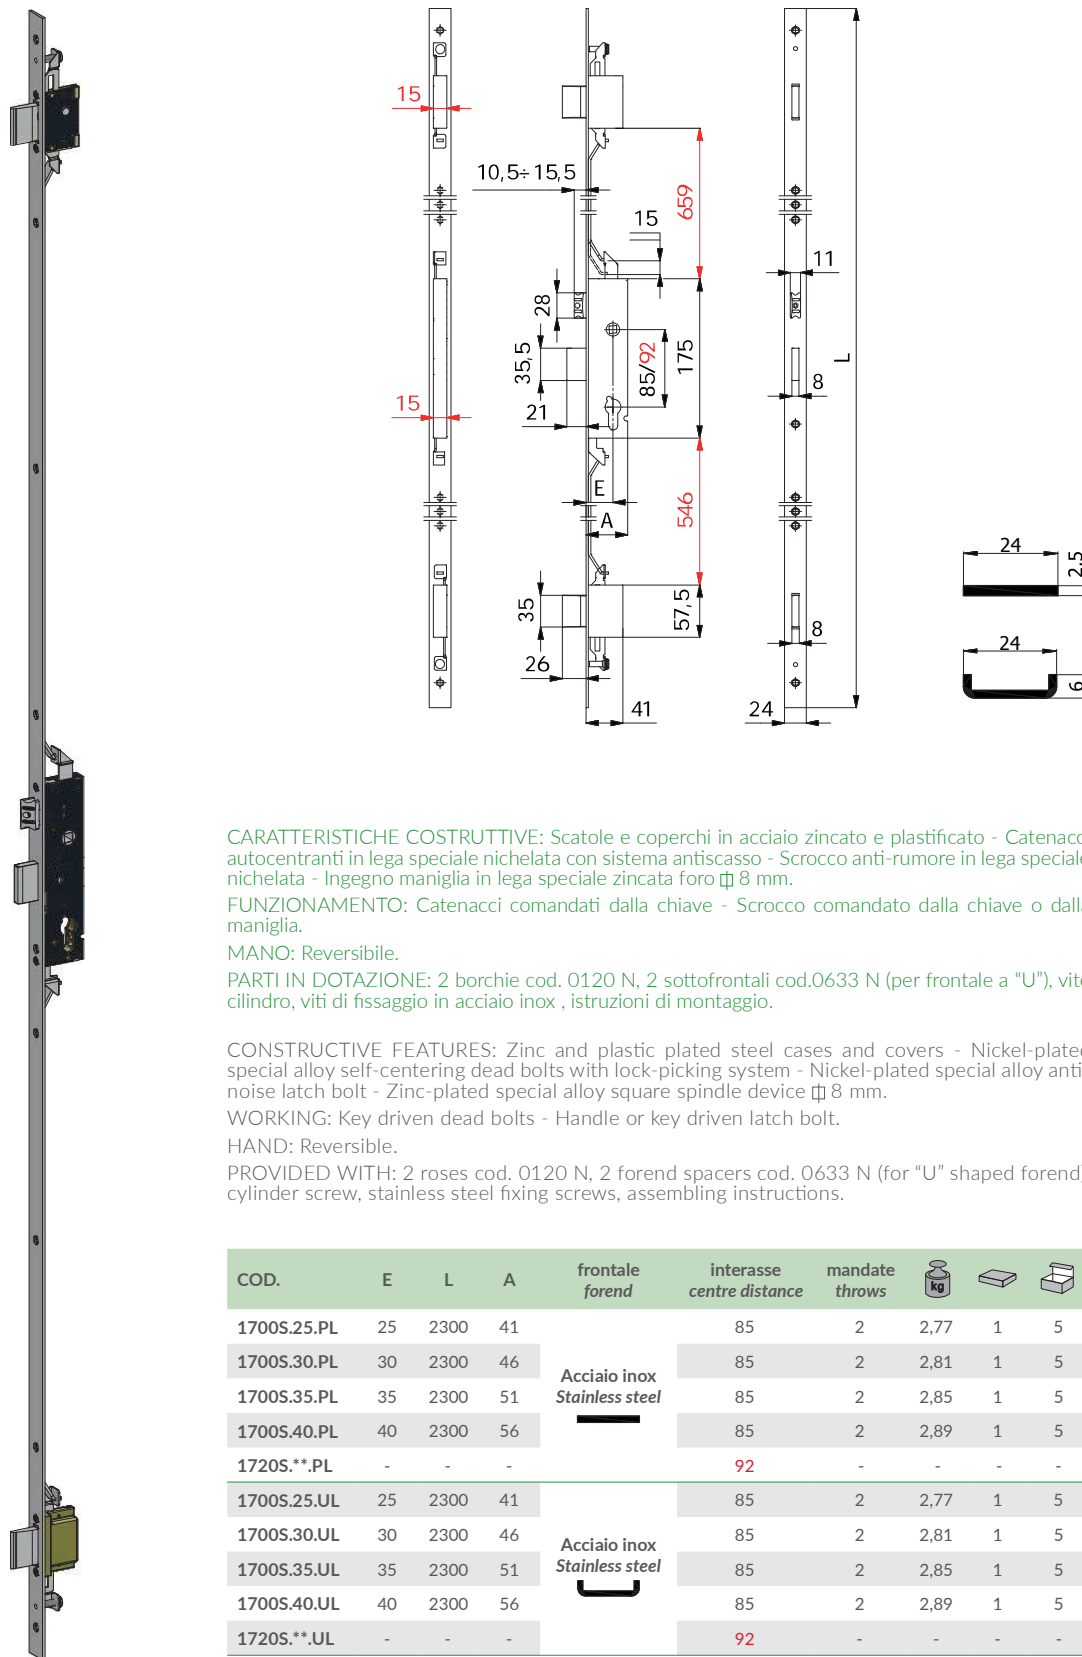

**CARATTERISTICHE COSTRUTTIVE:** Scatole e coperchi in acciaio zincato e plastificato - Catenacci autocentranti in lega speciale nichelata con sistema antiscasso - Scrocco anti-rumore in lega speciale nichelata - Ingegno maniglia in lega speciale zincata foro  $\varnothing$  8 mm.

**FUNZIONAMENTO:** Catenacci comandati dalla chiave - Scrocco comandato dalla chiave o dalla maniglia.

**MANO:** Reversibile.

**PARTI IN DOTAZIONE:** 2 borchie cod. 0120 N, 2 sottofrontali cod.0633 N (per frontale a "U"), vite cilindro, viti di fissaggio in acciaio inox, istruzioni di montaggio.

**CONSTRUCTIVE FEATURES:** Zinc and plastic plated steel cases and covers - Nickel-plated special alloy self-centering dead bolts with lock-picking system - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device  $\varnothing$  8 mm.

**WORKING:** Key driven dead bolts - Handle or key driven latch bolt.

**HAND:** Reversible.

**PROVIDED WITH:** 2 roses cod. 0120 N, 2 forend spacers cod. 0633 N (for "U" shaped forend), cylinder screw, stainless steel fixing screws, assembling instructions.

COD.	E	L	A	frontale forend	interasse centre distance	mandate throws	kg		
1700S.25.PL	25	2300	41	Acciaio inox Stainless steel	85	2	2,77	1	5
1700S.30.PL	30	2300	46		85	2	2,81	1	5
1700S.35.PL	35	2300	51		85	2	2,85	1	5
1700S.40.PL	40	2300	56		85	2	2,89	1	5
1720S.**.PL	-	-	-		92	-	-	-	-
1700S.25.UL	25	2300	41	Acciaio inox Stainless steel	85	2	2,77	1	5
1700S.30.UL	30	2300	46		85	2	2,81	1	5
1700S.35.UL	35	2300	51		85	2	2,85	1	5
1700S.40.UL	40	2300	56		85	2	2,89	1	5
1720S.**.UL	-	-	-		92	-	-	-	-

**CASSA STRETTA**  
**SLIM LOCK CASE**  
**15 mm**

