



CATENACCIO E SCROCCO REGOLABILE - DEAD AND ADJUSTABLE LATCH BOLT

SCROCCO INTERCAMBIABILE CON RULLO COD. 0535 - LATCH BOLT INTERCHANGEABLE WITH ROLLER BOLT COD. 0535



**CARATTERISTICHE COSTRUTTIVE:** Scatola e coperchio in acciaio zincato e plastificato - Frontale in acciaio inox - Catenaccio in lega speciale nichelata - Scrocco anti-rumore in lega speciale nichelata - Ingegno maniglia in lega speciale zincata foro  $\varnothing$  8 mm.

**FUNZIONAMENTO:** Catenaccio comandato dalla chiave - Scrocco comandato dalla chiave o dalla maniglia.

**MANO:** Reversibile.


**PARTI IN DOTAZIONE:** Vite cilindro.

**CONSTRUCTIVE FEATURES:** Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy dead bolt - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device  $\varnothing$  8 mm.


**WORKING:** Key driven dead bolt - Handle or key driven latch bolt.

**HAND:** Reversible.

**PROVIDED WITH:** Cylinder screw.

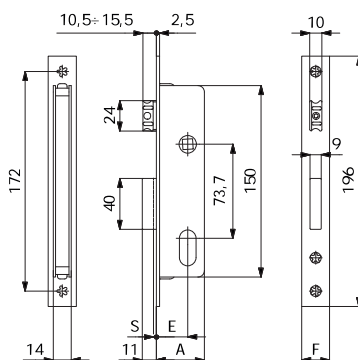

| COD.    | E  | F  | A  | S | mandate<br>throws | kg   |   |    |
|---------|----|----|----|---|-------------------|------|---|----|
| 338     | 25 | 16 | 38 | 2 | 1                 | 0,35 | 1 | 10 |
| 338/F22 | 25 | 22 | 38 | 2 | 1                 | 0,37 | 1 | 10 |
| 530     | 30 | 16 | 43 | 2 | 1                 | 0,38 | 1 | 10 |
| 530/F22 | 30 | 22 | 43 | 2 | 1                 | 0,40 | 1 | 10 |



CATENACCIO E SCROCCO REGOLABILE - DEAD AND ADJUSTABLE LATCH BOLT

SCROCCO INTERCAMBIABILE CON RULLO COD. 0535 - LATCH BOLT INTERCHANGEABLE WITH ROLLER BOLT COD. 0535



**CARATTERISTICHE COSTRUTTIVE:** Scatola e coperchio in acciaio zincato e plastificato - Frontale in acciaio inox - Catenaccio in lega speciale nichelata - Scrocco anti-rumore in lega speciale nichelata - Ingegno maniglia in lega speciale zincata foro  $\varnothing$  8 mm

**FUNZIONAMENTO:** Catenaccio comandato dalla chiave - Scrocco comandato dalla chiave o dalla maniglia.

**MANO:** Reversibile.


**PARTI IN DOTAZIONE:** Vite cilindro.

**CONSTRUCTIVE FEATURES:** Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy dead bolt - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device  $\varnothing$  8 mm

**WORKING:** Key driven dead bolt - Handle or key driven latch bolt.

**HAND:** Reversible.

**PROVIDED WITH:** Cylinder screw.

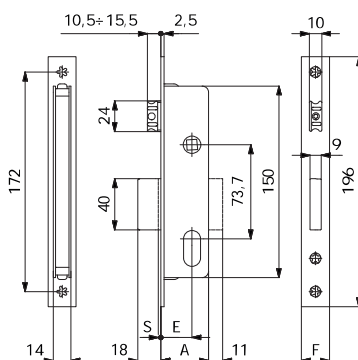

| COD.    | E  | F  | A  | S | mandate<br>throws | kg   |   |    |
|---------|----|----|----|---|-------------------|------|---|----|
| 358     | 25 | 16 | 38 | 2 | 2                 | 0,40 | 1 | 10 |
| 358/F22 | 25 | 22 | 38 | 2 | 2                 | 0,42 | 1 | 10 |
| 540     | 30 | 16 | 43 | 2 | 2                 | 0,43 | 1 | 10 |
| 540/F22 | 30 | 22 | 43 | 2 | 2                 | 0,45 | 1 | 10 |