



CATENACCIO E SCROCCO REGOLABILE - DEAD AND ADJUSTABLE LATCH BOLT

SCROCCO INTERCAMBIABILE CON RULLO COD. 0535 - LATCH BOLT INTERCHANGEABLE WITH ROLLER BOLT COD. 0535



**CARATTERISTICHE COSTRUTTIVE:** Scatola e coperchio in acciaio zincato e plastificato - Frontale in acciaio inox - Catenaccio in lega speciale nichelata - Scrocco anti-rumore in lega speciale nichelata - Ingegno maniglia in lega speciale zincata foro  $\varnothing$  8 mm.

**FUNZIONAMENTO:** Catenaccio comandato dalla chiave - Scrocco comandato dalla chiave o dalla maniglia.

**MANO:** Reversibile.


**PARTI IN DOTAZIONE:** Vite cilindro.

**CONSTRUCTIVE FEATURES:** Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy dead bolt - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device  $\varnothing$  8 mm.


**WORKING:** Key driven dead bolt - Handle or key driven latch bolt.

**HAND:** Reversible.

**PROVIDED WITH:** Cylinder screw.

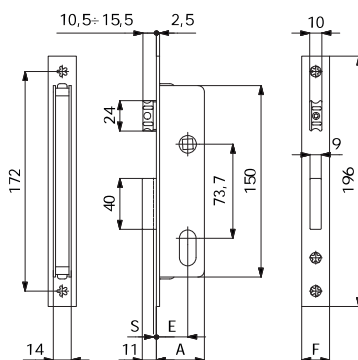

COD.	E	F	A	S	mandate throws	kg		
338	25	16	38	2	1	0,35	1	10
338/F22	25	22	38	2	1	0,37	1	10
530	30	16	43	2	1	0,38	1	10
530/F22	30	22	43	2	1	0,40	1	10



CATENACCIO E SCROCCO REGOLABILE - DEAD AND ADJUSTABLE LATCH BOLT

SCROCCO INTERCAMBIABILE CON RULLO COD. 0535 - LATCH BOLT INTERCHANGEABLE WITH ROLLER BOLT COD. 0535



**CARATTERISTICHE COSTRUTTIVE:** Scatola e coperchio in acciaio zincato e plastificato - Frontale in acciaio inox - Catenaccio in lega speciale nichelata - Scrocco anti-rumore in lega speciale nichelata - Ingegno maniglia in lega speciale zincata foro  $\varnothing$  8 mm

**FUNZIONAMENTO:** Catenaccio comandato dalla chiave - Scrocco comandato dalla chiave o dalla maniglia.

**MANO:** Reversibile.


**PARTI IN DOTAZIONE:** Vite cilindro.

**CONSTRUCTIVE FEATURES:** Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy dead bolt - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device  $\varnothing$  8 mm

**WORKING:** Key driven dead bolt - Handle or key driven latch bolt.

**HAND:** Reversible.

**PROVIDED WITH:** Cylinder screw.

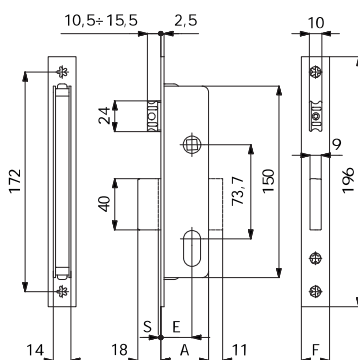

COD.	E	F	A	S	mandate throws	kg		
358	25	16	38	2	2	0,40	1	10
358/F22	25	22	38	2	2	0,42	1	10
540	30	16	43	2	2	0,43	1	10
540/F22	30	22	43	2	2	0,45	1	10