




6598 maniglia in folle a scatto (2 chiavi dotazione)
disengaged snap handle (2 keys supplied)

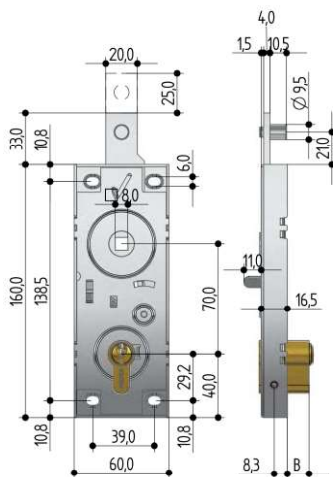

codice serrature <i>locks code</i>														B (mm)	ricambi <i>spare parts</i>		conf. multipla <i>multiple package</i>	conf. singola <i>single package</i>	min. ordinabile <i>minim. quantity</i>
1	2	3	4	5	6	7	8	9	10	11	12	13	14						
6	5	9	8	•	0	8	1	Z	0	0	0	0	0	-	senza cilindro <i>without cylinder</i>		40	1	1
6	5	9	8	•	0	8	1	0	0	2	0	0	0	13,7	6A00.2210	7100.2300	40	1	1
6	5	9	8	•	0	8	1	2	•	0	2	0	0	21,7	6A00.3010	7100.2400	40	1	1
6	5	9	8	•	0	8	1	4	•	0	2	0	0	31,7	6A00.4010	7100.2400	40	1	1

U598

U	5	9	8	•	0	8	4	0	•	0	0	0	0	15,7	UE0P.2410	7300.2A00	40	1	1
U	5	9	8	•	0	8	4	2	•	0	0	0	0	22,7	UE0P.3110	7300.2B00	40	1	1

W598

W	5	9	8	•	0	8	2	0	•	0	0	0	0	15,7	WE0M.2410	7300.2A00	40	1	1
W	5	9	8	•	0	8	2	2	•	0	0	0	0	22,7	WE0M.3110	7300.2B00	40	1	1

Applicazione: su porte basculanti, 1 chiusura lato superiore.
Funzionamento: dall'interno e dall'esterno apertura con maniglia, sbloccaggio dall'esterno con chiave, dall'interno con levetta lat.
Finiture: cilindro normale ottone, cilindro sicurezza serie U nichelato opaco, serie W nichelato sabbato opaco, scatola zincata.
Accessori: a richiesta cavallotti cod. 0458.E000.0000. Viti M5x14 cod. 0999.0900.0000. Maniglia e placca cod.0433.E., 0434..
Optional: quadro maniglia di serie mm 8x8 a richiesta mm 7x7 o mm 9x9.
Note: per gamma cilindri vedi pag.108.

Application: on overhead garage doors, 1 closing position at top.
Operation: with handle from inside and outside, unlocking from inside with side lever, from outside with key.
Finish: normal cylinder brass, U series nickel plated matt, W series nickel plated sandblasted matt, galvanised case.
Accessories: on request, mounting bolts code 0458.e000.0000 screws m5x14 code 0999.0900.0000. Handle and plate code 0433.E - 0434..
Optional: standard handle frame, 8x8 mm, on request 7x7 mm and 9x9 mm.
Note: for cylinders see page 108.