


SERRATURE PER PORTE BASCULANTI A CILINDRO PROFILO EUROPEO int. 70
LOCKS FOR OVERHEAD GARAGE DOORS WITH EUROPEAN PROFILE CYLINDER int. 70

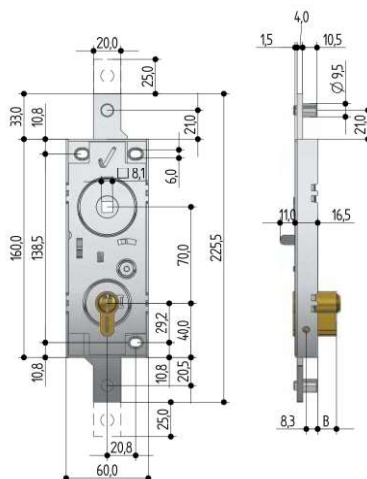

6599 maniglia in folle a scatto (2 chiavi dotazione)
disengaged snap handle (2 keys supplied)

codice serrature locks code														B (mm)	ricambi spare parts		conf. multipla multiple package	conf. singola single package	min.ordinabile minim. quantity
1	2	3	4	5	6	7	8	9	10	11	12	13	14						
6	5	9	9	•	0	8	1	Z	0	0	0	0	-	senza cilindro without cylinder	20	1	1		
6	5	9	9	•	0	8	1	0	0	2	0	0	13,7	6A00.2210	7100.2300	20	1	1	
6	5	9	9	•	0	8	1	2	•	0	2	0	21,7	6A00.3010	7100.2400	20	1	1	
6	5	9	9	•	0	8	1	4	•	0	2	0	31,7	6A00.4010	7100.2400	20	1	1	

U599

U	5	9	9	•	0	8	4	0	•	0	0	0	0	15,2	UEOP.2410	7300.2A00	20	1	1
U	5	9	9	•	0	8	4	2	•	0	0	0	0	22,7	UEOP.3110	7300.2B00	20	1	1

W599

W	5	9	9	•	0	8	2	0	•	0	0	0	0	15,2	WEOS.2410	7300.2A00	20	1	1
W	5	9	9	•	0	8	2	2	•	0	0	0	0	22,7	WEOS.3110	7300.2B00	20	1	1

Applicazione: su porte basculanti, 2 chiusure in alto e in basso.
Funzionamento: dall'interno e dall'esterno apertura con maniglia, sbloccaggio dall'esterno con chiave, dall'interno con levetta lat.
Finiture: cilindro normale ottone, cilindro sicurezza serie U nichelato opaco, serie W nichelato sabbato opaco, scatola zincata.
Accessori: maniglia e placca cod.0436.E
Optional: quadro maniglia di serie mm 8x8 a richiesta mm 7x7 o mm 9x9.
Note: per gamma cilindri vedi pag. 108.

Application: on overhead doors, 2 closing positions at top and bottom.
Operation: with handle from inside and outside, unlocking from inside with side lever, from outside with key.
Finish: normal cylinder brass, U series nickel plated matt, W series nickel plated sandblasted matt, galvanised case.
Accessories: Handle and plate code 0436.E
Optional: standard handle frame, 8x8 mm, on request 7x7 mm and 9x9 mm.
Note: for cylinders see page 108.