



- | | | |
|-------------|--|---|
| E207 | • M Maschi a macchina Scanalature elicoidali 15° | Fornito in HSS-E fino a nuovo stoc |
| E258 | • M Maschinen-Gewindebohrer, rechtsgedrallte Nuten 15° | Lieferung in HSS-E bis neuer Lagerbestand verfügbar ist |
| E212 | • M Machinetap met gespiraliseerde spaangroeven 15° | Geleverd in HSS-E tot de nieuwe voorraad beschikbaar is |
| E263 | • M Tarauds machine goujures hélicoidales 15° | Fourni en HSS-E jusqu'à ce que le nouveau stock soit disponible |

E207; E258	▪ 1.3 1.4
	• 1.2 1.5 7.2 7.3
E212; E263	▪ 1.3 1.4
	• 1.1 1.2 1.5 4.2 4.3 7.2 7.3

E207	M	DIN 371	6H		1.5XD	HSS-E PM	C 2-3		$\lambda 15^\circ$			
E258	M	DIN 376	6H		1.5XD	HSS-E PM	C 2-3		$\lambda 15^\circ$			
E212	M	DIN 371	6H		1.5XD	HSS-E PM	C 2-3		$\lambda 15^\circ$		TiN	
E263	M	DIN 376	6H		1.5XD	HSS-E PM	C 2-3		$\lambda 15^\circ$		TiN	

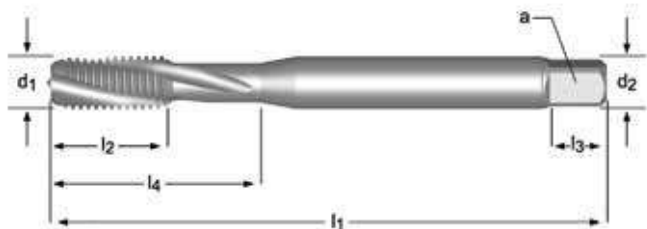

M	P mm	l ₁ mm	l ₂ mm	d ₂ Ø mm	∠ a mm	l ₃ mm	z		l ₄ mm	E207	E258	E212	E263
2	0.40	45	4	2.8	2.1	5	3	1.6	9	E207M2			
2.5	0.45	50	4	2.8	2.1	5	3	2.05	12.5	E207M2.5			
3	0.50	56	9	3.5	2.7	6	3	2.5	18	E207M3		E212M3	
4	0.70	63	12	2.8	2.1	5	3	3.3			E258M4	E212M4	
4	0.70	63	12	4.5	3.4	6	3	3.3	21	E207M4	E258M5		
5	0.80	70	13	3.5	2.7	6	3	4.2			E258M6	E212M5	
5	0.80	70	13	6.0	4.9	8	3	4.2	25	E207M5		E212M6	
6	1.00	80	15	4.5	3.4	6	3	5.0			E258M8	E212M8	
6	1.00	80	15	6.0	4.9	8	3	5	30	E207M6		E212M10	
8	1.25	90	18	6.0	4.9	8	3	6.8			E258M10		
8	1.25	90	18	8.0	6.2	9	3	6.8	35	E207M8		E212M12	E263M12
10	1.50	100	20	10.0	8.0	11	3	8.5	39	E207M10			
10	1.50	100	20	7.0	5.5	8	3	8.5			E258M14		E263M14
12	1.75	110	23	9.0	7.0	10	3	10.3			E258M16		E263M16
14	2.00	110	25	11.0	9.0	12	3	12.0			E258M18		E263M18
16	2.00	110	25	12.0	9.0	12	3	14.0			E258M20		E263M20
18	2.50	125	30	14.0	11.0	14	3	15.5					
20	2.50	140	30	16.0	12.0	15	3	17.5					

M	P mm	l ₁ mm	l ₂ mm	d ₂ ∅ mm	∇ a mm	l ₃ mm	z	 mm	l ₄ mm	E207	E258	E212	E263
22	2.50	140	34	18.0	14.5	17	4	19.5			E258M22		E263M22
24	3.00	160	38	18.0	14.5	17	4	21.0			E258M24		E263M24
27	3.00	160	38	20.0	16.0	19	4	24.0			E258M27		E263M27
30	3.50	180	45	22.0	18.0	21	4	26.5			E258M30		E263M30
36	4.00	200	55	28.0	22.0	25	4	32.0			E258M36		E263M36